


Corrugated profile G4 (38/333/1000) *1

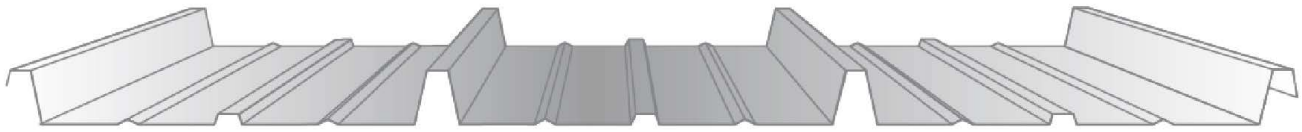


Lengths	1500 – 15000 mm (extra charge for shorter lengths)
---------	--

Steel thickness	0,5 mm, 0,6 mm, 0,75 mm
-----------------	-------------------------

Combinable with sandwich panel G4, e.g. for apron plates or canopies.

Corrugated profile H8 (20/125/875)* 1

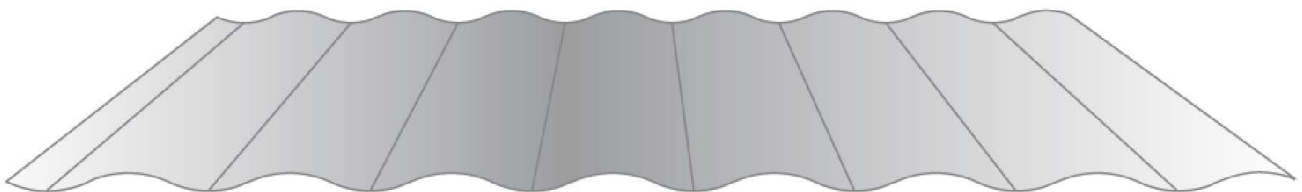

Lengths	2000 – 7500 mm
---------	----------------

Steel thickness	0,5 mm, 0,6 mm, 0,75 mm
-----------------	-------------------------

Profile like sandwich panel H-Wall 8P, e.g. for cladding of solid walls.

Flat sheets

Lengths	2000 * 2 – 6000 mm
---------	--------------------


Steel thickness	0,5 mm, 0,6 mm, 0,75 mm
-----------------	-------------------------

* 2 shorter lengths available on request

* 1 max. span 1.000 mm

External sheets of Hipertec Wall, Monowall and Superwall with profiled rim available on request (special packaging).

KGL	TGL	BL	SL	SE	VID	VAD	QM	AS	AWT	KFL	ASS	QS	EK	WE	PP	VS	IH	Buha	EDV	MT	
	✓	✓		✓	✓	✓			✓			✓	✓		✓		✓				✓

	Drawn up by	Hoffmann	Authorised	Management Board	Valid after	14.03.2017	Page 1 of 1
	Date	09.03.2017	Datum		Valid unti	Revocation	